

# Surface Well Testing

## Separadores

Equipo	SP-SWT-001, 002, 003, 004 Trifásico	SP-SWT-005 Trifásico	SP-SWT-006 4 Fases	SP-SWT-007 Trifásico	SP-SWT-008 Trifásico
Presión de Trabajo	1,440 psi (99 bar)	1,440 psi (99 bar)	1,440 psi (99 bar)	2,000 psi (138 bar)	1,440 psi (99 bar)
Medida del Separador	30" x 10'	36" x 10'	54" x 15'	48" x 12.5'	42" x 10'
Temperatura	121°C (250°F)	110°C (230°F)	121°C (250°F)	121°C (250°F)	121°C (250°F)
Servicio	H2S				
Código de Diseño	ASME VIII Div 1 NACE MR0175 ASME B31.3				
Capacidad de Líquido	6,500 BPD	8,200 BPD	25,185 BPD	15,000 BPD	10,000 BPD
Capacidad de Gas	30 MMPCD	40 MMPCD	92 MMPCD	80 MMPCD	30 MMPCD

# Surface Well Testing

## Separadores


SP-SWT-002, 003, 004



SP-SWT-001



SP-SWT-005

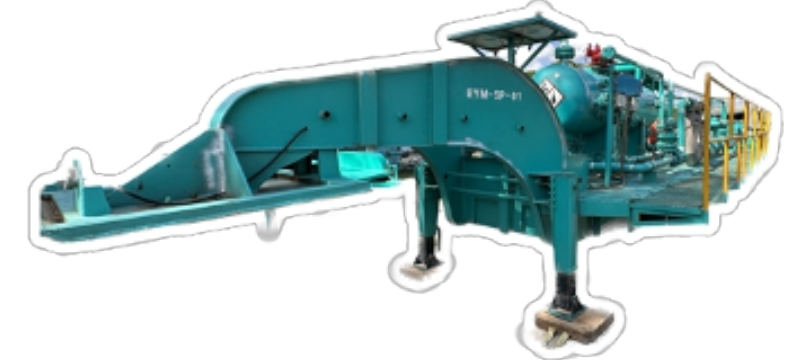

SP-SWT-006



SP-SWT-007



SP-SWT-008

